




DEC Bearing Industrial Limited

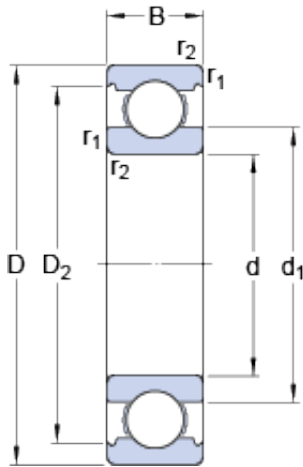

6222/C3VL0241 Bearing 2D drawings and 3D CAD models

SKF 6222/C3VL0241 deep groove ball bearings

Bearing No. 6222/C3VL0241

Size	200x110x38 mm
Bore Diameter	200 mm
Outer Diameter	110 mm
Width	38 mm
d	110 mm
D	200 mm
B	38 mm
d ₁	138 mm
D ₂	179 mm
r _{1,2} - min.	2.1 mm
d _a - min.	122 mm
D _a - min.	184 mm
D _a - max.	188 mm
r _a - max.	2 mm
Basic dynamic load rating - C	151 kN
Basic static load rating - C ₀	118 kN
Fatigue load limit - P _u	4 kN
Reference speed	6700 r/min
Limiting speed	4300 r/min
Calculation factor - k _r	0.025
Calculation factor - f ₀	14
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A



DEC Bearing Industrial Limited

Weight / Kilogram	4.469
EAN	7316572206713
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	Electrical Insulation on Outer Ring
Cage Material	Steel
Internal Clearance	C3-Loose
Inch - Metric	Metric
Long Description	110MM Bore; 200MM Outside Diameter; 38MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; Electrical Insulation on Outer Ring Internal Special Features; C3-Loose I
Other Features	Deep Groove VL0241 Aluminum Oxide Coated External Surfaces
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	6222/C3VL0241
Weight / LBS	9.844
Bore	4.331 Inch 110 Millimeter
Outside Diameter	7.874 Inch 200 Millimeter



DEC Bearing Industrial Limited

Outer Race Width	1.496 Inch 38 Millimeter
Inner Race Width	0 Inch 0 Millimeter
bore diameter:	110 mm
static load capacity:	118 kN
outside diameter:	200 mm
precision rating:	Not Rated
overall width:	38 mm
finish/coating:	Aluminum Oxide
bore type:	Round
outer ring width:	38 mm
closure type:	Open
fillet radius:	2 mm
snap ring included:	Without Snap Ring
maximum rpm:	4300 RPM
internal clearance:	C3
series:	62
dynamic load capacity:	151 kN
resistance features:	Current-Insulating Coating
d_1	138 mm
D_2	179 mm
$r_{1,2}$ min.	2.1 mm
d_a min.	122 mm
D_a min.	184 mm
D_a max.	188 mm
r_a max.	2 mm
Basic dynamic load rating C	151 kN
Basic static load rating C_0	118 kN
Fatigue load limit P_u	4 kN
Calculation factor k_r	0.025
Calculation factor f_0	14.3
Mass bearing	4.42 kg